formetiq DESKING

Alto 2

3-stage dual motor standing desk frame HAFS233



Features

Available in black, white or grey

Fast and smooth height adjustment - no juddering

Programmable control panel with 3 height memory presets, digital height display and reminder timer

Advanced anti-collision safety system with adjustable sensitivity

Ultra quiet motors, lower than 50dB


Holeless column legs

Integrated cable tidy

Easy to assemble

Frame	3 stage holeless square columns
	Optional integrated cable tray
Frame Finishes	Black / White / Grey
Height range	580-1230 mm
Stroke length	650mm
Load capacity	275lbs / 125kg
Motor	Twin/Dual motors, 38mm/s
	Advanced anti-collision safety system with adjustable sensitivity
Power	100-240V, max. 450W, low standby power <0.5W (3.1m power cable)
Noise level	<50dB
Desktop capacity	W1100-1900 x D700-800 mm
Control panel	Height adjustment (up/down)
	3 height memory presets
	Height display
	Reminder timer function
Warranty	5 years
Certification	CB, CE-EMC, CE-LVD, RoHS, FCC, UL, CUL, RCM
Boxed Dimensions (1) x 2 boxes	W1140 x D260 x H210 mm
Boxed Weight (1)	36kg each *Caution: Heavy*



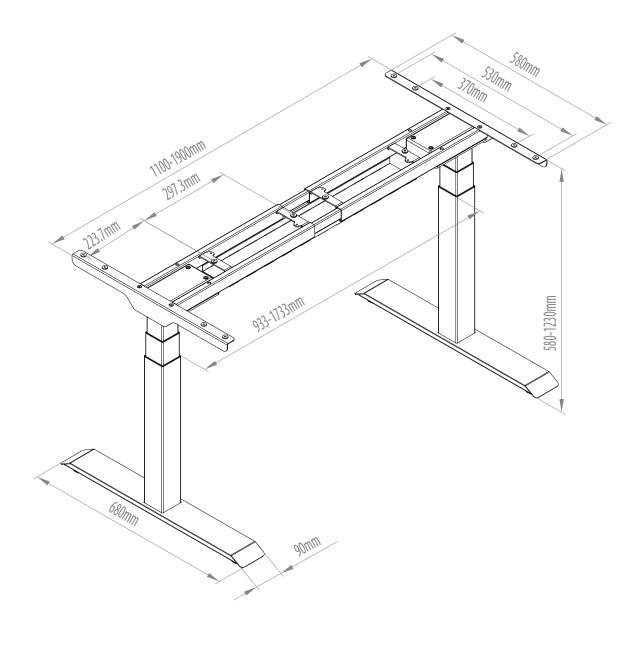



Acoustic fabric screens

Desktop divider screen / modesty panel G4E033 / G4E015



FEATURES

- Certified sound absorption class C
- Lightweight (lower desk load, easier to transport)
- Height-adjustable (except for Alto 2 2-desk benches)
- Visually attractive interior detail possibility to combine 2 colours of fabric
- Option to reverse and fix screen from any side you want


QUALITY STANDARD

- LST EN ISO 354:2004
- LST EN ISO 11654:1998

TECHNICAL INFORMATION

Screen composition (42 mm)

- Frame made of 15x40 mm plywood;
- · Central layer made of 10 mm polystyrene foam;
- Second layer is made of HR3030 10 mm foam from both sides;
- Third layer is made of VB2240 3 mm foam from both sides;
- · Dowel pins combine two panels;
- Upholstered with 1 colour fabric or 2 colour fabric combination.



Height adjustment (not available for Alto 2 2-desk benches)

- Screens are inserted into the fittings (154x124, H=74 mm);
- Pressed with screws to ensure stability;
- Fixed to the desktop.
- Screens can be raised / lowered to the preferred height;
- Only two screws must be tightened to ensure stability.





